



UGC (CPE) and DST Sponsored
International Conference on
**Recent Trends in
Science and Technology**
22-23 March, 2018



PROCEEDINGS



Organized by

Vidya Bharati Shaikshanik Mandal Amravati's

S.S.S.K.R. Innani Mahavidyalaya

Karanja (Lad), Dist. Washim (M.S.)

Reaccredited at level 'A' grade by NAAC (CGPA 3.24)

& Conferred CPE status by UGC, New Delhi.

In collaboration with

Department of Mathematics & IQAC

Sant Gadge Baba Amravati University, Amravati

Vidya Bharati Mahavidyalaya, Amravati

&

Shri. Dr.R.G.Rathod Science College, Murtizapur

Venue: S.S.S.K.R. Innani Mahavidyalaya Campus, Karanja (Lad)

Email: icrst2018@gmail.com Website : www.ssskrimv.org.in Contact No.: 07256-222148/222171

INVESTIGATION UNDER DC GLOW DISCHARGE SPECTROMETRY

¹K. P. Kadam, ²A.P.Pachkawade, ³G.R.Yerawar & ⁴N.M. Khobragade

^{1,3,4} Arts, Commerce & Science College, Arvi. Dist. Wardha (M.S.)

² Rajarshree Shahu Science College, Chandur Rly. Dist. Amravati (M.S.)

drkishorkadam1@rediffmail.com

ABSTRACT

Phenomenon of discharge of electricity through the study of property of ionized gases has proved to be fruitful for the investigation. The dc glow discharge spectrometry is the most essential part of the electrical and spectral emission studies of the molecules, atoms and ions in the interface of solid and liquid. We measured the intensity of radiation emitted by dc glow discharge as a function of discharge current for the different electrolytes along with V-I characteristics. The voltage-ampere characteristics during a glow discharge in the atmospheric pressure gas using an electrolytic solution as the anode and metal electrode like tungsten as a cathode were carried out. Under the study of glow discharges of various elements, a monochromatic light at various wavelengths generated. Few species shows a change in the color of the glow when discharge current increased. We investigated negative resistance of solutions. This behavior investigated as tunneling behavior of electrolytic solution using DC glow discharge.

Keywords: glow discharge, interface, radiation intensity, tunneling.

INTRODUCTION

Electrical and spectral characterization of the glow discharge [1-7] of the material helps in studying the chemical composition of the material. The elements in the material may be excited in the plasma [8] produced between liquid and solid interface. The neutral atoms, ionized atoms and molecules are excited and they emit characteristic spectrum and hence atomic, ionic or molecular species may be identified. Spectral study of the glow discharge [3,4,7,9] of the material helps in studying the chemical composition of the material. The solid liquid junction is formed when current is passed through the junction; a plasma film is generated along the interfaces between solid and liquid. The plasma pressure is very near to the atmospheric pressure [10,11,12]. [The plasma parameters in DC glow discharge may be generated by a current source [13].] The method is very low cost and quick results may be obtained and therefore has wide applications.

When electric discharge is passed to a conducting solution from an electrode, which is placed in the gas space above the liquid surface, reactions take place in the liquid phase and the process is referred to as "Glow Discharge Electrolysis (GDE)". The dc glow discharge continues to be the subject of spectroscopic research [15] and analytical method development. Glow discharges [14] are used for a variety of technological, physical and analytical applications, ranging from plasma etching and deposition systems in the micro-electronics

industry, to lasers or even plasma monitors. Traditionally [14] dc-glow discharge optical emission spectroscopy is mainly applied in the materials sciences where it is used for bulk and surface analysis, pellets containing the adsorbed liquid and direct analysis of the liquid samples by use of adequate sample introduction techniques. Liquids can be analyzed directly at atmospheric pressures, when applying the atmospheric electrolyte cathode glow discharge cell approach with detection by emission spectroscopy as described by Cserfalvi and Mezei [3].

MATERIAL AND METHODS

The experimental arrangement used for the investigation of dc glow discharge is simple and. It is inexpensive arrangement and it is very much cost effective. It consists of tungsten electrode of length 40 mm and diameter 3mm fused in glass capillary tube and suspended axially in a hollow slotted stainless steel cylinder, of length 6 cm and internal diameter 2.54 cm. The stainless steel cylinder served as another electrode i.e. anode in the glow discharge. The suspended end of tungsten rod was carefully rounded. The tungsten electrode can be used as cathode by connecting it to the dc power supply of 700 V capacity having 1.5 A current capacity. In this arrangement the hollow cylinder was dipped in a electrolytic aqueous solution taken in a glass beaker. The depth of immersion of the tungsten electrode in electrolyte solution could be adjusted with the help of micrometer adjustable stand. By using this

arrangement the tip of tungsten electrode could be just brought in touch with the upper surface of the solution or the distance between the solution surface and the electrode may be adjusted. In this way the solution itself acts as another electrode.

The different 28 electrolytic solutions have been taken for investigation using the glow discharge system. With the help of the above-mentioned experimental arrangement the following properties may be studied.

RESULT AND DISCUSSIONS

Variation of electrolytic current with the applied dc-voltage during glow discharge in atmospheric pressure gas using 28 electrolytic solutions as the anode and cathode were carried out. The colors emitted on the glow are observed and listed in table 1. As an example we consider the electrolytic aqueous solution of 0.5N Cd(NO₃)₂.4H₂O as the anode, the electrolytic process leading to a luminescent glow is best depicted by the standard voltage-current curve as shown in figure 1. The curve may be divided in to several regions and its behavior may be studied.

In the region AB the curve is almost linear, the Ohms law is satisfied and conventional electrolysis found with tiny bubbles of gas around both material electrodes-tungsten electrode and stainless steel electrode. At the voltage corresponding to point B in curve, a smooth evolution of gas bubbles is disturbed and layer of steam is seen at the tungsten cathode. In the region between B and C, the pointer of voltmeter and ammeter widely fluctuates. In this region the characteristics like current passing through the electrode and voltage applied found as unstable.

The behavior of region BC, CD and DE can be explained as follows. Because of increase in the applied dc voltage, the rate of gas evolution is increased with the formation of large size gas bubbles at a fast rate.

2	0.5N KOH	Lavender	Lavender
3	0.25 N LiNO ₃	Reddish	Reddish
4	0.1N Pb(NO ₃) ₂	Bluish	Bluish
5	0.5N MgSO ₄	Green	Orange
6	0.5N CuCl ₂ .2H ₂ O	Green	White
7	0.05N AgNO ₃	Pale Green	Yellow
8	0.5N NaCl	Yellow	Yellow
9	0.5N KNO ₃	Lavender	Lavender
10	0.5N CaCl ₂	Orange	Pink

Table 1: Colour of Discharge Glow

This decreases the rate of migration of the ions and charge transfer process at the electrodes. When voltage is further increased more fluctuations are obtained in both voltage and current readings with fall in current. This unstable decreased current is shown by line BC. In the neighborhood of point C it is found that fluctuation rate decreases and now hissing sound occurs. When the applied dc voltage reaches to the point C, there is intermittent sparking. The formation of gas bubbles around the tungsten electrode has now stopped. After increasing the applied dc-voltage to a still higher value the formation of movable thin vapor film around the tungsten cathode takes place, which at times produces the vortex motion and visible glow spark of greenish-blue color is found in the gap between cathode and solution phase. Due to vortex motion, electrolyte periodically touches to the tungsten cathode surface. This produces local heating at the tungsten cathode surface and visible glow spark of bluish-green color. Due to the local heating process there produces the vapor jet and nearby liquid molecules tried to take its place. The region CD of V- I characteristics shows this situation. Thus the region B to C represents the negative slope as seen in the curve. When the electrolyte current decreases to the corresponding point D, the violent gas evolution stops and slope of the curve changes sign from negative to positive. After the point D, with the applied dc voltages the current starts increasing and thereby producing a stable superheated insulating layer around the cathode (tungsten electrode). At this situation a continuous bluish-green glow is developed at the cathode surface. For a further increase in applied dc voltage, the intensity of the glow increases continuously with the increase in current also as shown in figure 1. Thus the region beyond D i.e. along DE appears to be true glow discharge. This happens due to the discharge of accumulated ions through the insulating layer. This situation produces intense glow of bluish-green color and it sometimes can be pictured as corona discharge. Thus under the observation, it is

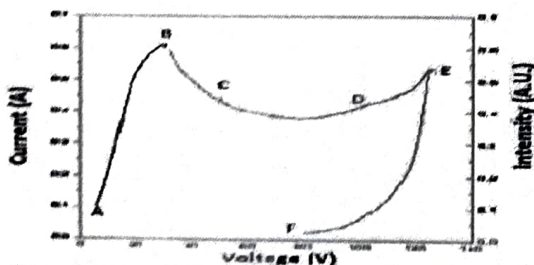


Fig.1: V- I Characteristics of 0.5N Electrolytic Solution of Cd(NO₃)₂.4H₂O

Sr. No	Electrolytic Solution	Colour of glow when solution used as	
		Anode	Cathode
1	0.5N NaOH	Yellow	Yellow

quite obvious that the superheated insulating layer around the cathode is the governing factor responsible for the bluish-green glow.

Tunnel Behavior Under V-I Characteristics of DC-glow Discharge

The discharge parameter like V-I characteristics of dc-glow discharge between the solid and liquid interfaces behaves like that of Tunnel diode. This has been investigated under the observation of V-I characteristics of aqueous solution of different concentrations. The energy band diagrams of cathode type and anode type (plasma band) materials as shown in figure 2. (a, b and c) can be used to explain the Tunneling phenomenon.

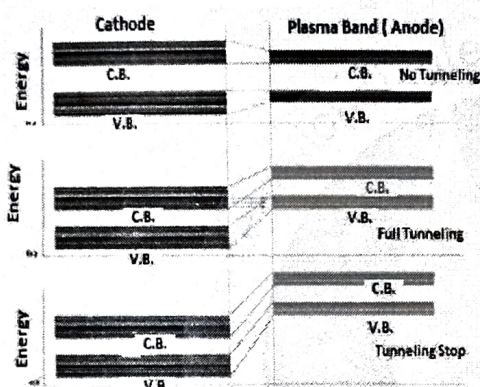


Fig 2 : Energy band diagram for Tunneling phenomenon

When the cathode type material (tungsten electrode) is joined, the energy band diagram under no bias condition becomes as shown in figure 2. (a). The junction barrier produces only a rough alignment of the two materials and their respective valence and conduction bands, hence no tunneling occurs. Initially when a lower voltage in equal step is applied, the energy band diagram become as shown in figure 2. (b). Due to the downward movement of the cathode region, the anode region valence band becomes exactly aligned with the cathode region conduction band. At this stage, electrons tunneling takes place as shown in figure and it 54

For this investigation taking the example of V-I characteristics for aqueous solution of 0.5 N KOH by dc glow discharge as shown in figure 3. With initially gradually increasing dc-voltage, the significant electrolyte current rises to its peak value say I_p and the corresponding applied voltage reaches to a value say V_p (at point B).

When applied voltage is increased to a value greater than V_p , the electrolyte discharge current starts decreasing till it achieves its minimum value called valley current I_v corresponding to valley

voltage V_v (at point D). For the voltages greater than V_v current starts increasing again as in any ordinary junction diode.

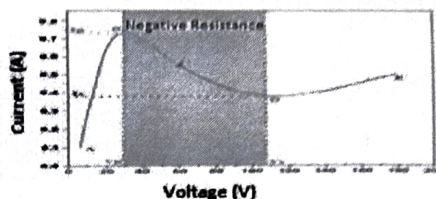


Fig.3: Tunnel Behavior Under V-I Characteristics of 0.5 N KOH Electrolytic Solution

In a similar way to negative resistance of the Tunnel diode it is seen from the figure in the region between peak point B and valley point D that the electrolyte current decreases with increase in the applied voltage. This behavior of the characteristics is similar to the electrolytic cell possesses negative resistance in this region. In fact this contributes the most useful property of the diode. Instead of absorbing power a negative resistance produces power.

Table 2 Tunnel behavior of electrolytic solution by dc glow discharge

Sr.No	Electrolytic solution	Ip/Iv ratio	Negative resistance
			$R_n = -dV/dI$
1	0.5N FeSO4	1.937	-191.907
2	0.5 N CdSO4	1.645	-141.35
3	0.5 N KCl	1.4366	-175.0067
4	0.5 N NiSO4	1.1872	-862.42
5	0.25 N COCl2	1.471	-111.55
6	0.25 N TiO2	1.4759	-316.96
7	0.5N AlCl3	1.5	-250
8	0.5N (NH4)2SO4	1.43	-159.168
9	0.5N KOH	1.9375	-230.88
10	0.5N KNO3	1.7179	-211.739

I_p/I_v ratio is almost as important factor at the point of view of the negative resistance of electrolyte. It determines the depth of the negative resistance. By adopting the same procedure we investigate the V-I characteristic of twenty seven solutions. Further we obtain the characteristics like I_p , I_v and I_p/I_v ratio with negative resistance dV/dI for all the solutions and the results are tabulated in table 2..

Another point worth noting is that this resistance increases as we go from point B to D because as applied voltage is increased current keeps decreasing which means that negative resistance of electrolytic cell keeps increasing.

Thus the resistance offered by the electrolyte within the negative-resistance section of its

characteristic (shown in figure as shaded) during glow discharge is the reciprocal of the slope of V-I characteristic in this region. Thus the negative resistance $R_n = -dV/dI$ in the region BD. Its value depends on the composition of electrolyte (aqueous solution), current and voltage.

I_p/I_v ratio is almost as important factor at the point of view of the negative resistance of electrolyte. It determines the depth of the negative resistance. By adopting the same procedure we investigate the V-I characteristic of twenty seven solutions. Further we obtain the characteristics like I_p , I_v and I_p/I_v

ratio with negative resistance dV/dI for all the solutions and the results are tabulated in table 2.

CONCLUSION

DC Glow discharge using a solution as the anode and the metallic electrode as the cathode for the investigation of phenomenon of spectrometry shows that, a sensitive and inexpensive technique and very much cost for the elemental analysis of electrolytic solutions.

REFERENCES

1. T. Cserfalvi and P. Mezei (1996), Operating Mechanism of the Electrolytic Cathode Atmospheric Glow Discharge, Fresenius Journal of Analytical Chemistry(Springer Link), pp: 83-89
2. Michael R. Webb, Francisco J. Andrade, Gerardo Gamez, Robert McCrindle and Gary M. Hieftje,(2005), Spectroscopic and Electrical Studies of a Solution Cathode Glow Discharge, J. Anal. At. Spectrom., 20, pp: 1218- 1225
3. T Cserfalvi, P Mezei and P Apai,(1993), Emission Studies on a Glow Discharge in Atomic Pressure Air using Water as a Cathode, J. Phys. D, , 26, 2184-2188
4. Stephane Baude, Jose A.C.Broekaert, Daniel Delfosse, Norbert Jakubowski, Lars Fuechtjohann, Nestor G. Orellana-Velado, Rosario Pereiro and Alfredo Sanz- Medel (2000), Glow discharge atomic spectrometry for the analysis of environmental samples-a review. J.Anal.At.Spectrom.2000,Vol.15,pp:1516-1525
5. John Marshal, Simon Chenery, E. Hywel Evans and Andrew Fisher(1998), Atomic Spectrometry Update- Atomic Emission Spectrometry, Journal of Analytical Atomic Spectrometry, June 1998, Vol. 13,pp: 107R- 130R
6. A A Garamoon, A Samir, F F Elakshar and E F Kotp (2003),Electrical Characteristics of a DC glow discharge, Plasma Sources Science Technol.12(2003), pp: 417-420
7. Tamas Cserfalvi and P. Mezei, J. Anal. At. Spectrom (1994), Direct solution analysis by glow discharge: electrolyte cathode discharge spectrometry, J. Anal. At. Spectrom. 1994, 9, pp: 345-349
8. Z. Machalaa, M. Jandaa, K. Hensela, I. Jedlovsky, L. Leatinska, V.Foltinc, V. Martiaovita and M. Morvova(2007), Emission spectroscopy of atmospheric pressure plasmas for biomedical and environmental applications, J. of Molecular Spectroscopy, Vol. 243, Issue 2, pp:194-201
10. Michael R. Webb, George C.-Y.Chan, Francisco J.Andrade, Gerardo Gamez, and Gary M. Hieftje (2006), Spectroscopic characterization of ion and electron population in a solution – Cathode Glow discharge, J.Anal.At. Spectrom. 2006, 21,pp 525- 530.
11. David Staack, Bakhtier Farouk, Alexander Gutsol and Alexander Fridman (2005), Characterization of a DC atmospheric pressure normal Glow Discharge, Plasma sources Sci. Technol. 14, 2005, pp. 700-711
12. Christoph Gerhard, Tobiasweins, Daniel Tasche (2013), Atmospheric Pressure plasma treatment of fused silica related surface and near surface effects and applications, Plasma Chemistry and Plasma Processing, 2013, 33(5), pp. 895 – 905.
13. Santak V, Zaplotnik R, Tarle Z, Milosevic S (2015), Optical Emission spectroscopy of an atmospheric pressure plasma jet during tooth bleaching Gel Treatment, Appl. Spectrosc., 2015, pp. 1327 – 1333.
14. Mohammed Khalaf, Osdad A Hammadi Firas J. Kahim (2016), Current Voltage Characteristics of DC plasma Discharges Employed in Sputtering Techniques, IJAP, 2016, 12(3), pp.11 – 16.
15. Norbert Jakubowaski, Volkar Hoffmann, Annemie Bogaerts(2003), Foreword: Glow discharge spectrometry, J.Anal.At.Spectrom, 2003,20,pp.19N-22N
16. John Marshall, Simon Chenery, E. Hywel Evans, Andrew Fisher (1998), Atomic Spectrometry Update-Atomic emission spectrometry, J. Anal. At. Spectrom., 1998,13, 107R-130R.